

Installation Instructions

VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE



This product has been designed and manufactured to work correctly with installation as described in these instructions.

Failure to follow these instructions could result in damage to property, damage to the product and or potential injury.

It is very important that you read and understand these instructions thoroughly before installing this product.

Included Contents:

- Tuning Module
- Wiring Loom
- Fastening Ties
- Installation and User instructions
- Protective Bag For Module – (prevents damage to unit casing)



Before installation:

1. Open the vehicle's bonnet
2. Remove the ignition key
3. Close and lock the doors
4. Wait 5 minutes before removing any electrical plugs



Do not open the vehicle doors or unlock the vehicle while installation is in progress.

Installation Location:

The module should be installed between the vehicle's Rail and Boost Pressure sensors as shown in the diagram.

Locating the Unit:

The unit itself should be mounted away from:




Sources of Extreme Heat



Sources of Vibration



Sources of Spray Water

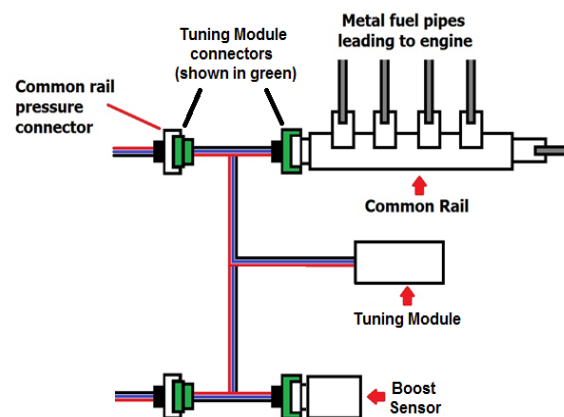

K3-FEP4-B-116B

Installation Instructions

VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE

Introduction




- Ensure that your engine looks similar to the supplied photographs. (minor changes with ancillary components are to be expected, however if the engine looks nothing alike, please contact Support.
- Familiarise yourself with the locations of the connectors highlighted.
- Make sure that you have a good grasp of the operation of the connector clips and or locking tabs. - If the connectors you are trying to access are in an awkward place, it may be useful to try unplugging (and then re-inserting) a connector on the vehicle which is more easily accessible. Alternatively try plugging together the connectors on the Tuning Module itself.

Installation Instructions


VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE

Introduction

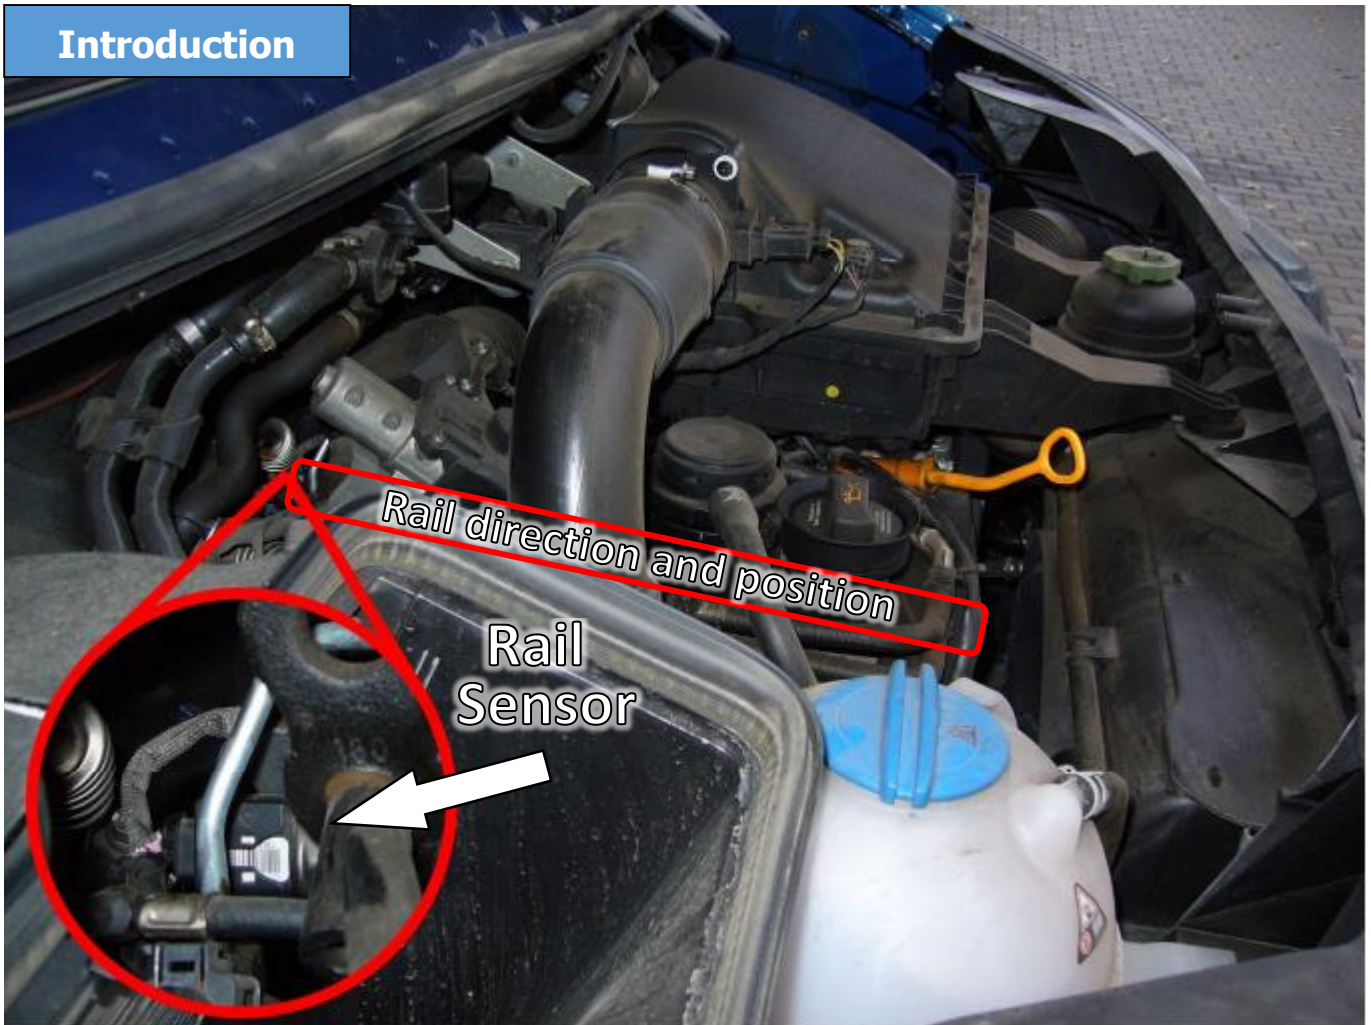

- Please familiarise yourself with the location of the rail, it is positioned directly below the airbox indicated by the red box.

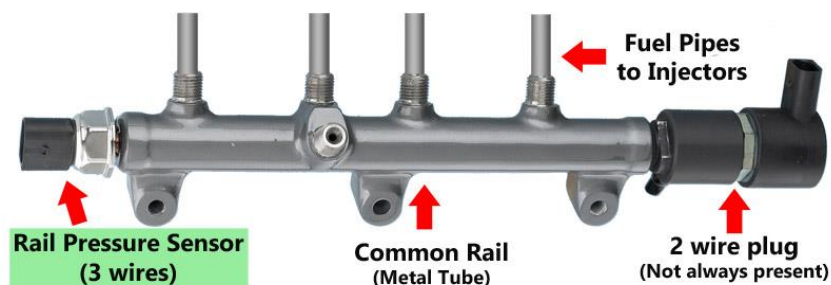


General outlook of the fuel rail in a common rail engine

Installation Instructions

VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE

Step 1

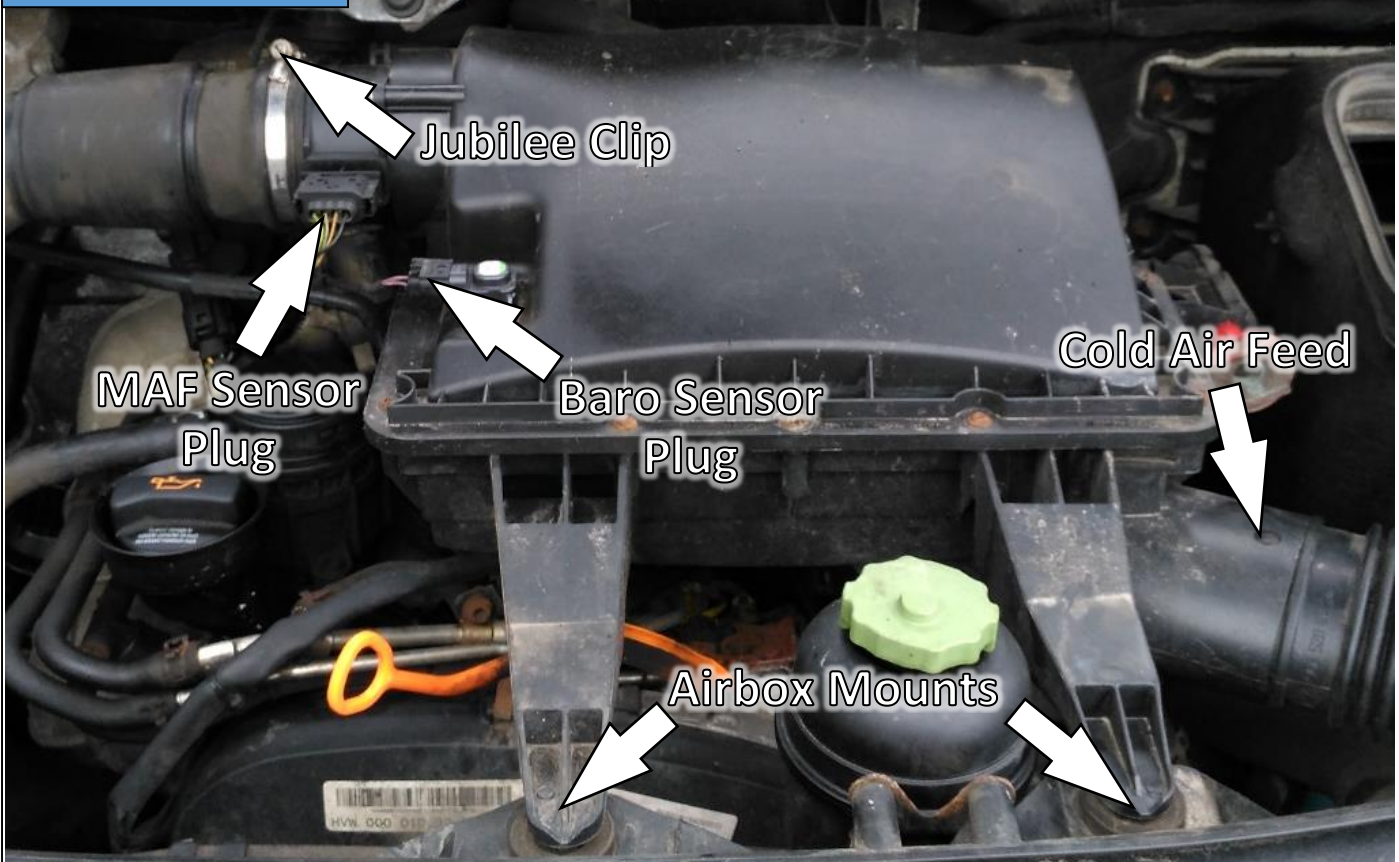


- Loosen the Jubilee Clip highlighted above using a flat blade screwdriver or socket. Then disconnect the air hose from the MAF sensor
- Unplug the MAF sensor Plug and Baro sensor plug.
- Disconnect the cold air feed pipe from the airbox. This is held in by flexible lugs, simply depress them and pull out the pipe.
- Depending upon the exact specification there are sometimes ancillary components clipped to the side of the airbox. If this is the case, unclip them.
- Lift up the airbox at the airbox mounts highlighted until it pops out of the mounting holes.
- Ensuring that nothing else remains attached, withdraw the airbox from the engine bay.

Installation Instructions

VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE

Step 2

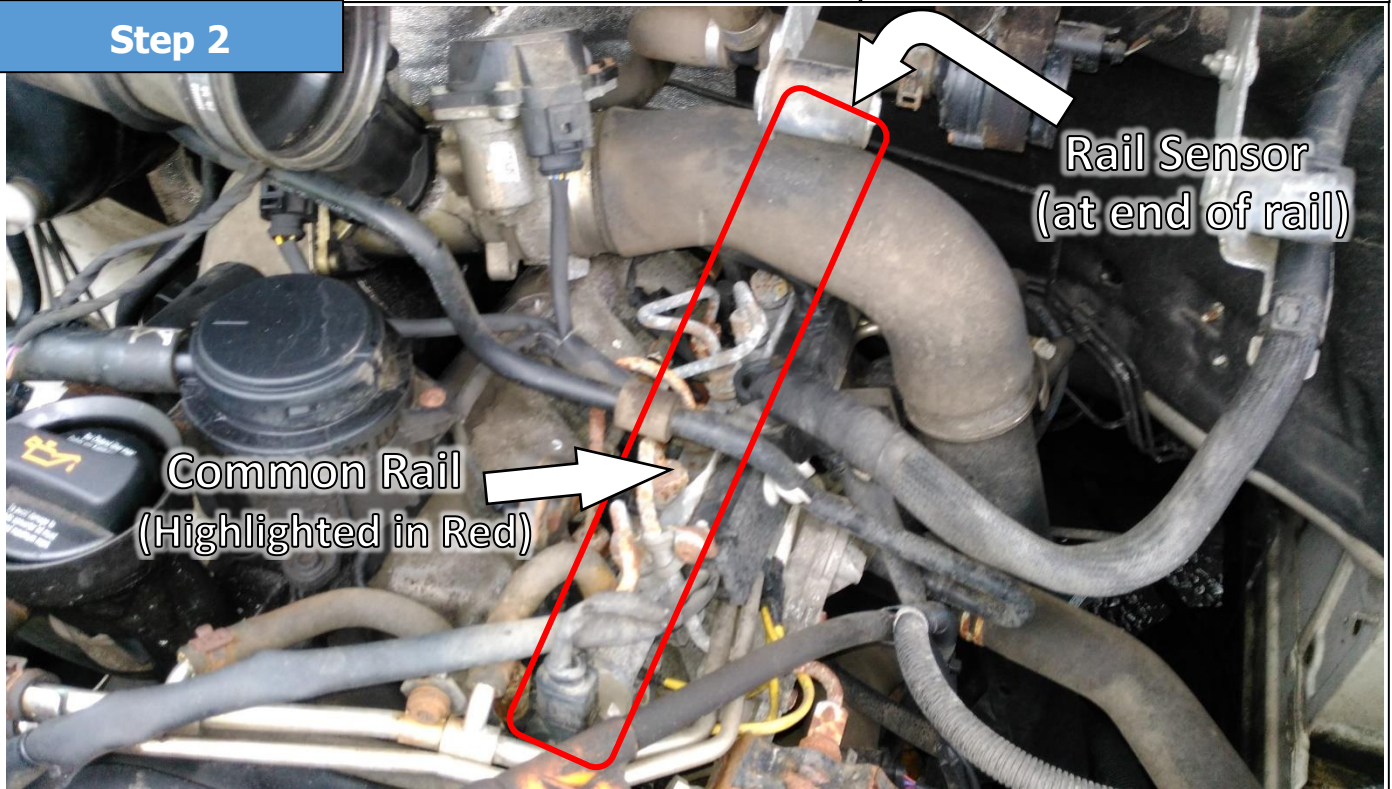



- With the airbox removed the Common Rail is easily visible.
- The Rail Pressure Sensor is positioned at the rear of the rail pointing towards the cabin of the vehicle.

Installation Instructions

VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE

Step 3

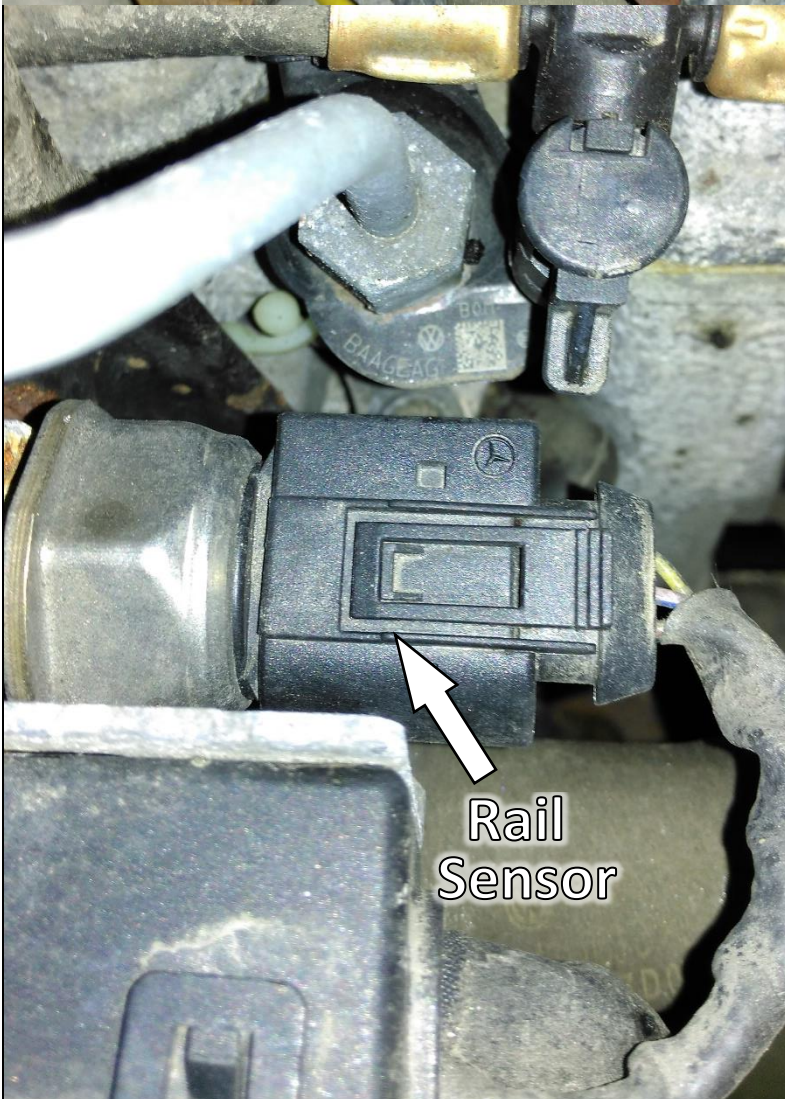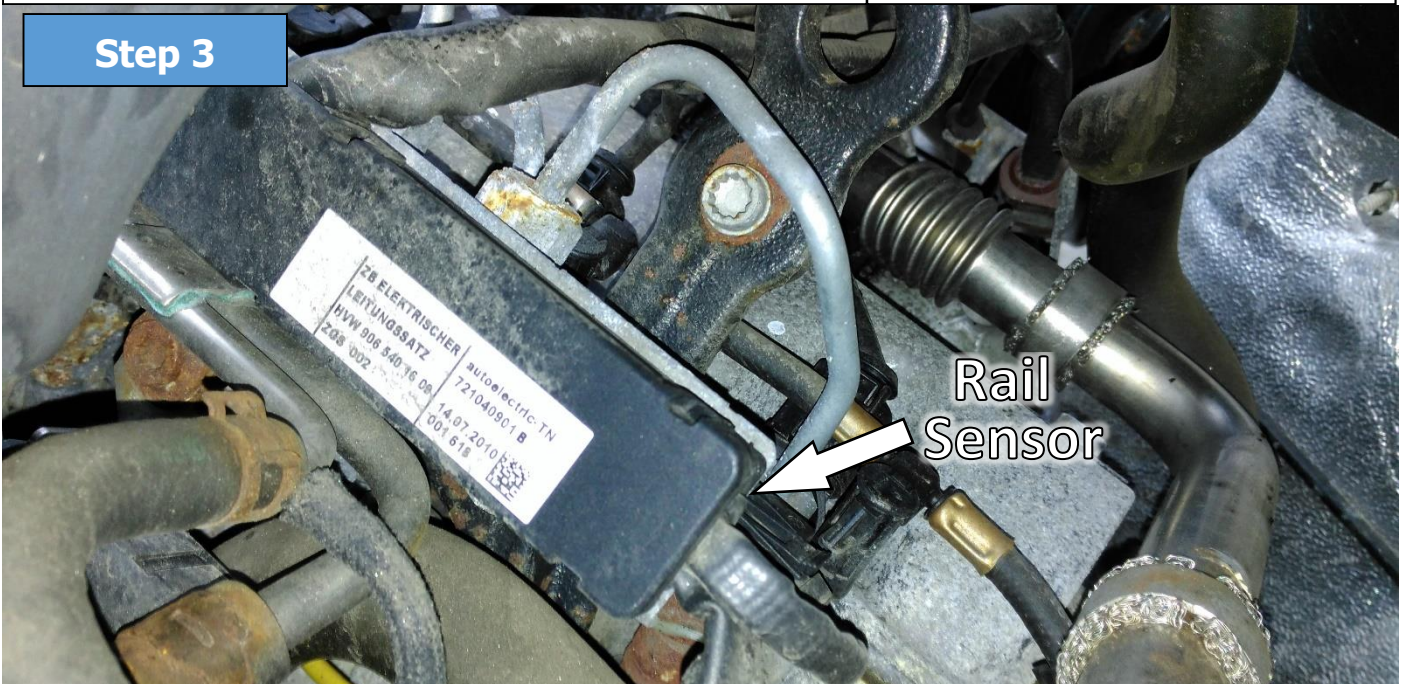

- Unplug the Rail Sensor connector (3 pin) by lifting the releasing tab and pulling back on the connector
- Insert the connector from the Tuning Module's wiring loom onto the Rail Sensor.
- Insert the Vehicle's Rail Sensor connector into the corresponding connector on the Tuning Module's wiring loom.

Installation Instructions

VW Crafter 2.5 - Cr Tech & Bluespark Pro

Bluespark
AUTOMOTIVE

- With the unit successfully installed please secure the unit and wiring loom within the engine bay, paying attention to the guidelines highlighted on Page 1.



Route the tuning box wiring harness away from sources of heat (exhaust manifolds, EGR pipes, most stainless steel pipes) and also away from any rotating parts such as belts.

- Double check all connections are correct and firmly connected. If this is the case, start the vehicle and ensure there are no engine warning lights or error messages displayed.

If everything is as it should be, please feel free to take the vehicle out for a test drive and enjoy the added responsiveness and power added to your vehicle by the Tuning Module.