

Installation Instructions

1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro

Bluespark
AUTOMOTIVE



This product has been designed and manufactured to work correctly with installation as described in these instructions.

Failure to follow these instructions could result in damage to property, damage to the product and or potential injury.

It is very important that you read and understand these instructions thoroughly before installing this product.

Included Contents:

- Tuning Module
- Wiring Loom
- Fastening Ties
- Installation and User instructions
- Protective Bag For Module – (prevents damage to unit casing)

Before installation:

1. Open the vehicle's bonnet
2. Remove the ignition key
3. Close and lock the doors
4. Wait 5 minutes before removing any electrical plugs



Do not open the vehicle doors or unlock the vehicle while installation is in progress.

Installation Location:

The module should be installed between the vehicle's Rail and Boost Pressure sensors as shown in the diagram.

Locating the Unit:

The unit itself should be mounted away from:




Sources of Extreme Heat



Sources of Vibration



Sources of Spray Water

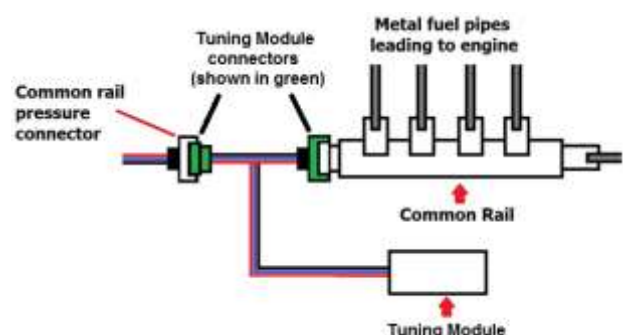

H3-B-192

Installation Instructions

1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro



Introduction



Introduction

- Ensure that your engine looks similar to the supplied photographs (minor changes with ancillary components are to be expected, however if the engine looks nothing alike, please contact support.)
- Familiarise yourself with the locations of the connectors highlighted.
- Make sure that you have a good grasp of the operation of the connector clips and or locking tabs. - If the connectors you are trying to access are in an awkward place, it may be useful to try unplugging (and then re-inserting) a connector on the vehicle which is more easily accessible. Alternatively try plugging together the connectors on the Tuning Module itself.

Installation Instructions

1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro

Bluespark
AUTOMOTIVE

Step 1




- Remove the plastic engine cover. This usually pulls off with a firm tug. On certain models the cover is secured with bolts. If this is the case, remove the bolts and lift off the engine cover.
- You should be left with an engine that looks similar to the photo above. The position of the airbox and battery may vary depending on the particular vehicle layout.

Installation Instructions

1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro

Bluespark
AUTOMOTIVE

Step 2.1

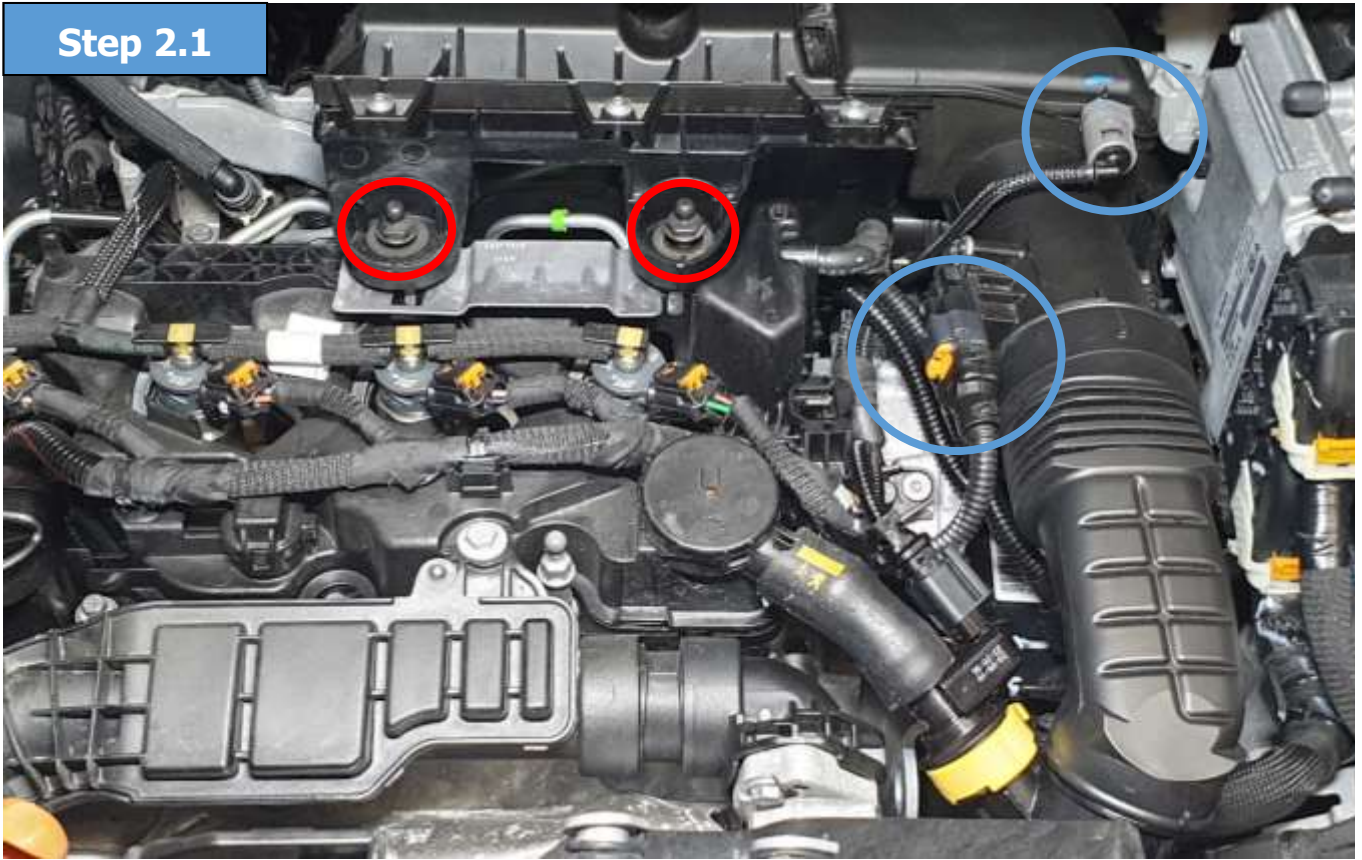

- Loosen the airbox by removing the two locking bolts circled in red.
- Disconnect the two connectors circled in blue.

Installation Instructions


1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro

Bluespark
AUTOMOTIVE

Step 2.2



- Loosen the upper intake pipe from the airbox outlet.
- Loosen the lower intake pipe from both ends and remove.
- The air box can now be pushed back to access the rail sensor.

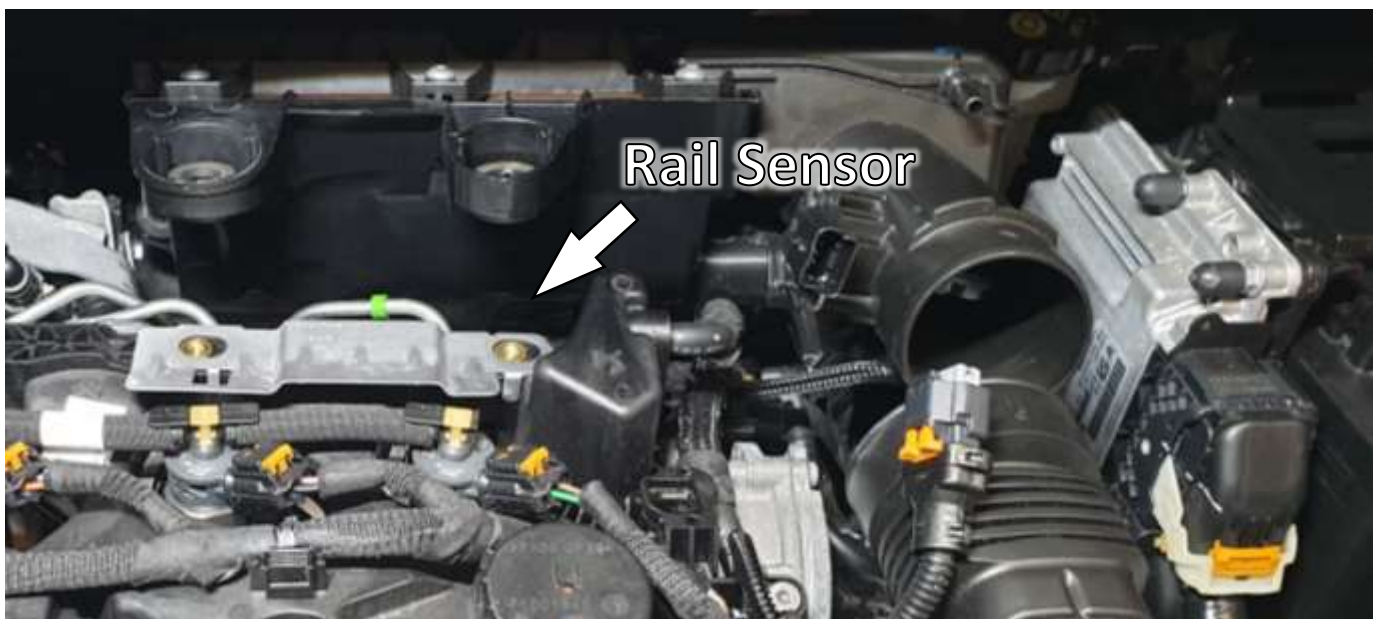


Installation Instructions

1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro

Bluespark
AUTOMOTIVE

Step 2.3

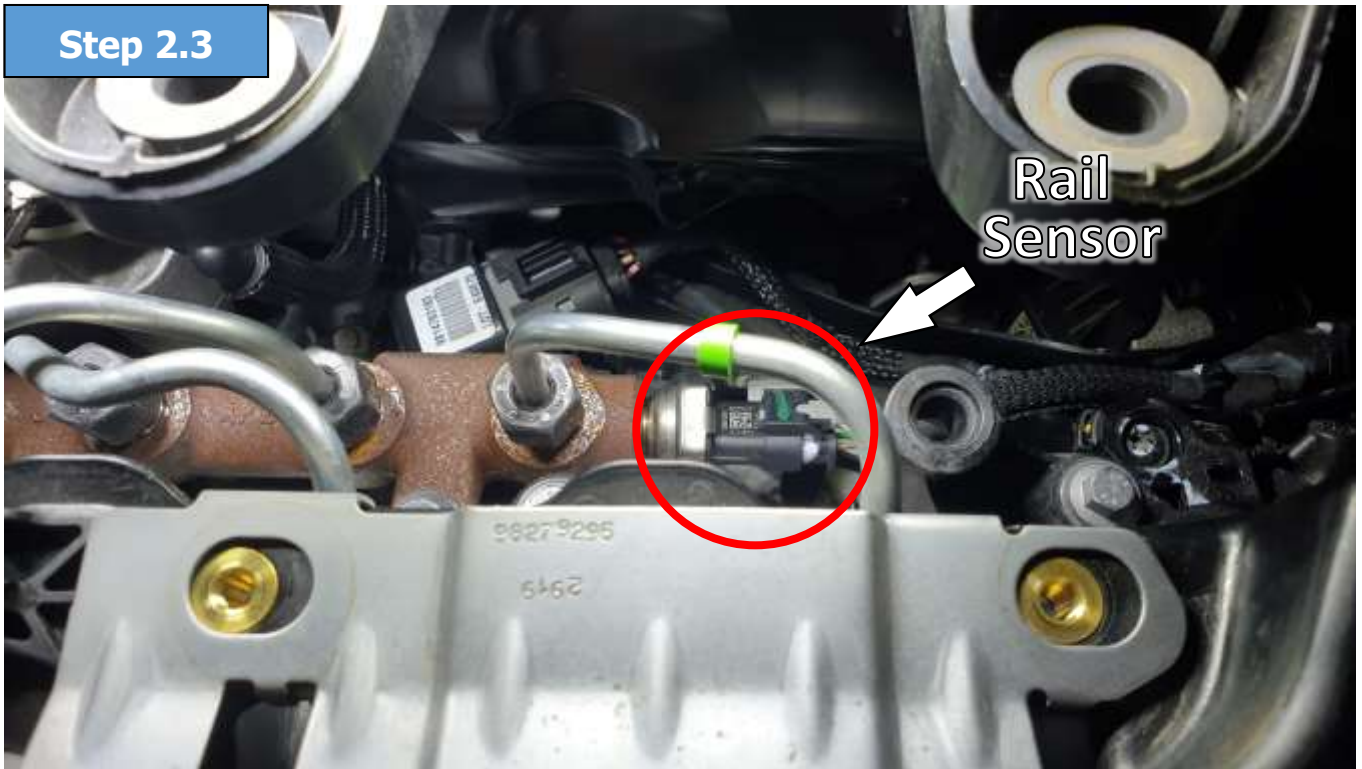

- Unplug the Rail Sensor connector (3 pin) by sliding back the grey locking tab and pushing down on the release clip and pulling back on the connector.
-
- Insert the connector from the Tuning Module's wiring loom onto the Rail Sensor.
- Insert the Vehicle's Rail Sensor connector into the corresponding connector on the Tuning Module's wiring loom.

Installation Instructions

1.5 PSA/Ford/Vauxhall Blue Engine – CR Tech and Bluespark Pro



- Carefully reposition the air box and attach the intake pipes.
- Reconnect the connectors removed in step 2 and fix the airbox with the two locking bolts.
- Refit the engine cover that was removed during the installation process.
- With the unit successfully installed please secure the unit and wiring loom within the engine bay, paying attention to the guidelines highlighted on Page 1.



Route the tuning box wiring harness away from sources of heat (exhaust manifolds, EGR pipes, most stainless steel pipes) and also away from any rotating parts such as belts.

- Double check all connections are correct and firmly connected. If this is the case, start the vehicle and ensure there are no engine warning lights or error messages displayed.

If everything is as it should be, please feel free to take the vehicle out for a test drive and enjoy the added responsiveness and power added to your vehicle by the Tuning Module.